


SKSK190M-28

DATA SHEET

KSK Line

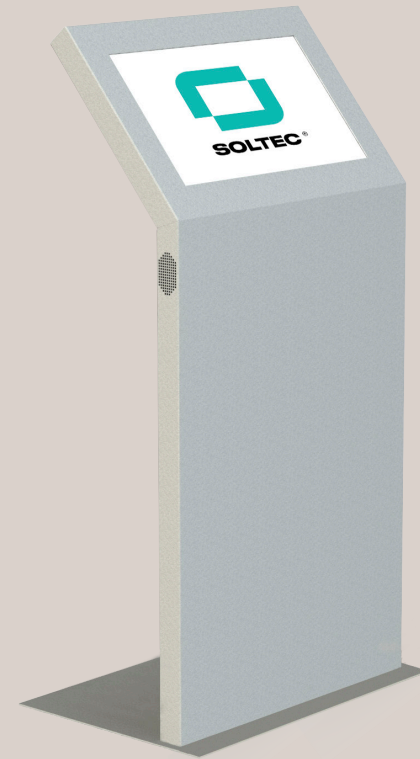

KSK Line · Interactive Multimedia Kiosk

At a height of 1.2m and one of the thinnest designs on the market, this kiosk is the perfect solution for any interactive point installation.



SKSK190M-28

SOLTEC TECHNICAL SPECIFICATIONS

INTERACTIVE MULTIMEDIA KIOSK KSK Line

GENERAL DESCRIPTION

Interactive Multimedia Kiosks with a classic design.

At a height of 1.2m and one of the thinnest designs on the market, this kiosk is the perfect solution for any interactive point installation. Built-in projected capacitive touch screen and a PC that can be customized according to customers' technical requirements.

Touch Screen



Thermal printer



Keyboard



Speakers



Outdoor Housing



Magnetic band reader



Full range of options available.



DISPLAY

Panel Technology	Edge LED Technology
Display Area (mm)	376.3(H) x 301.06(V)
Size	19.0"
Pixel Pitch (mm)	0.294 x 0.294
Screen Aspect	5:4
Native Resolution	1.280 x 1.024
Viewing Angle UDLR	85°/85°/80°/80°
Contrast Ratio	1000:1 (Typ)
Brightness cd/m2	350 (Typ)
Colors	16.7M Colors
Response Time	5ms Ton + Toff
Life Time (hours)	50.000
Touch Screen	Capacitive Technology

BUILT-IN PC

CPU	Intel QuadCore J3455
Platform	Mini-ITx
RAM Memory	4GB DDR3 SO-DIMM
HDD	120GB SATA SSD
Ethernet Chipset	Roaltek RTL8111GR Gigabit
Graphics Chipset	Intel HD Graphics 500

ELECTRICAL

Power Supply Input	110/220VAC 50-60Hz
Power Consumption	90W
Energy Management	VESA DPMS

MECHANICAL (SKSK190M-28)

Net without base (mm)	1205x429x50
Net with base (mm)	1205x429x375
Packing (WxHxD)	1280x580x530
Net Weight (Kg)	60

ENVIRONMENTAL CONDITIONS

Operation Temperature	0° to 60°
Storage Temperature	-20° to 60°
Operation Humidity (%)	5 to 90
Storage Humidity (%)	5 to 90

OTHERS

Certifications	CE; RoHS
Plug & Play	VESA DDC2Bi
Accessories	Mains Power Cord User Manual

OPTIONS

Computer upgrate	Intel i3, i5, i7 RAM 4GB DDR3
Amplifier + Speakers	2W x 2W Speakers
Protective Glass	4mm tempered glass
Keyboard+ Trackball	Stainless steel IP65
High Brightness Panel	1.000cd/m ²
Thermal Printer	60/80/120/A4
Bar Code Rader	Lineal, PDF417, QR
RFID Reader	Manual / Motorized
Customized housing	
Option 1	Painted RAL Palette
Option 2	Stainless steel housing
Option 3	Outdoor IP65

Specifications subject to change without prior notice

