


# SKSK150M-28

DATA SHEET

KSK Line

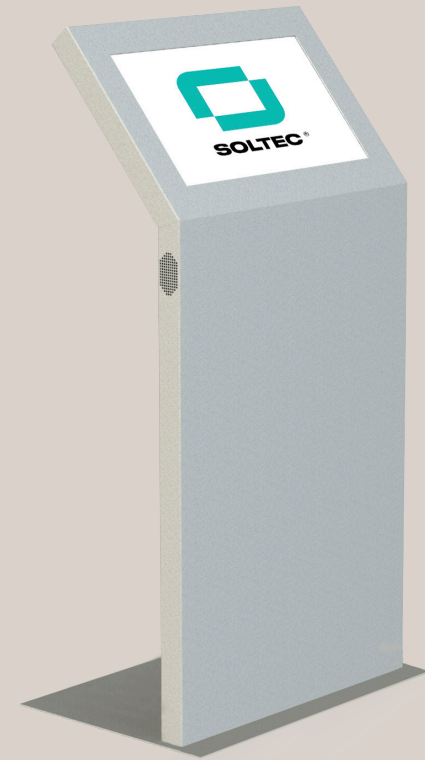

## **KSK Line · Interactive Multimedia Kiosk**

At a height of 1.2m and one of the thinnest designs on the market, this kiosk is the perfect solution for any interactive point installation.



# SKSK150M-28

## INTERACTIVE MULTIMEDIA KIOSK

### KSK Line

### GENERAL DESCRIPTION

Interactive Multimedia Kiosks with a classic design.

At a height of 1.2m and one of the thinnest designs on the market, this kiosk is the perfect solution for any interactive point installation. Built-in PC that can be customized according to customers' technical requirements.

Touch Screen



Thermal printer



Keyboard



Speakers



Outdoor Housing



Magnetic band reader



Full range of options available.



### DISPLAY

Panel Technology	Edge LED Technology
Display Area (mm)	304.1(H) x 228.1(V)
Size	15.0"
Pixel Pitch (mm)	0.297 x 0.297
Screen Aspect	4:3
Native Resolution	1.024 x 768
Viewing Angle UDLR	80°/80°/70°/70°
Contrast Ratio	700:1 (Typ)
Brightness cd/m2	400 (Typ)
Colors	16.7M Colors
Response Time	11ms Ton + Toff
Life Time (hours)	50.000
Touch Screen	Capacitive Technology

### BUILT-IN PC

CPU	Intel QuadCore J3455
Platform	Mini-ITx
RAM Memory	4GB DDR3 SO-DIMM
HDD	120GB SATA SSD
Ethernet Chipset	Roaltek RTL8111GR Gigabit
Graphics Chipset	Intel HD Graphics 500

### ELECTRICAL

Power Supply Input	110/220VAC 50-60Hz
Power Consumption	90W
Energy Management	VESA DPMS

### MECHANICAL (SKSK150M-28)

Net without base (mm)	1200x400x50
Net with base (mm)	1200x445x375
Packing (WxHxD)	1280x580x530
Net Weight (Kg)	60

### ENVIRONMENTAL CONDITIONS

Operation Temperature	0° to 40°
Storage Temperature	-10° to 50°
Operation Humidity (%)	5 to 90
Storage Humidity (%)	5 to 90

### OTHERS

Security	CE; RoHS
Plug & Play	VESA DDC2Bi
Accessories	Mains Power Cord User Manual

### OPTIONS

Computer Upgrade	Intel i3, i5, i7 RAM 4GB DDR3
Amplifier + Speakers	2W x 2W Speakers
Protective Glass	4mm tempered glass
Touch Screen	Projected Capacitive
Keyboard+ Trackball	Stainless steel IP65
High Brightness Panel	1.000cd/m <sup>2</sup>
Thermal Printer	60/80/120/A4
Bar Code Rader	Lineal, PDF417, QR
RFID Reader	Manual / Motorized
Customized housing	
Option 1	Painted RAL Palette
Option 2	Stainless steel housing
Option 3	Outdoor IP65

Specifications subject to change without prior notice

